


STS 폴리 표준 치수표 (축 홀가공 타입)

S8M형

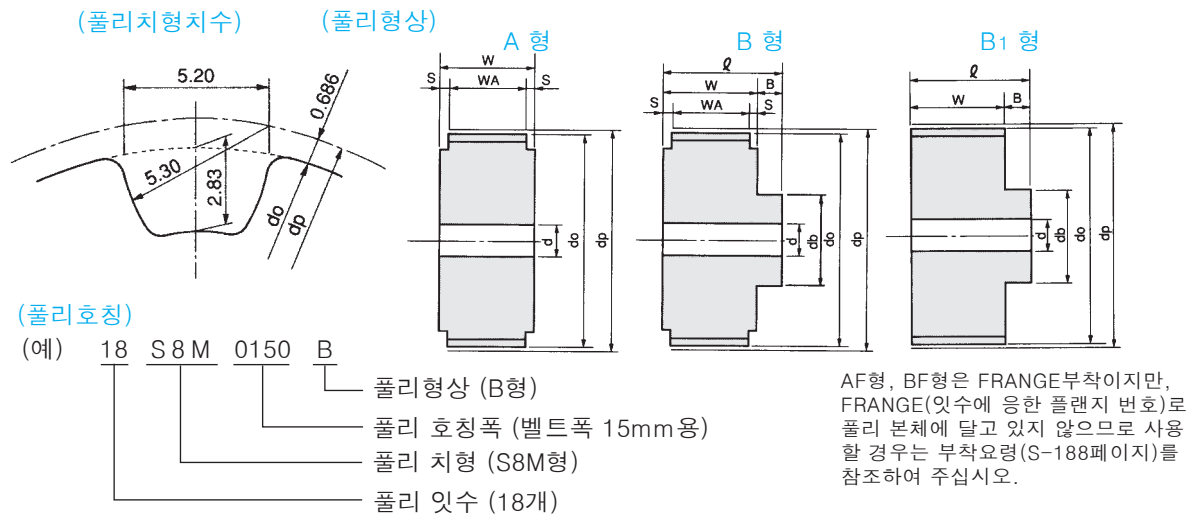

S8M0150 (벨트폭 15mm용)

는 재고판매 하고 있습니다. 단위 : mm

잇수	형상	재질	dp	do	W	l	WA	S	B	db	d			폴리예상질량 (kg)		플렌지 품 번
											MAX		MIN			
											A	B, B1	A, B, B1	A	B, B1	
18	A, B	기계구조용탄소강강재	45.84	44.46	23	38	17	3	15	29	28	19	12	0.21	0.28	FS 5333
19	A, B		48.38	47.01	23	38	17	3	15	34	30	22	12	0.24	0.34	FS 5638
20	A, B		50.93	49.56	23	38	17	3	15	35	32	23	12	0.28	0.38	FS 5939
21	A, B		53.48	52.10	23	38	17	3	15	35	34	23	12	0.31	0.41	FS 5939
22	A, B		56.02	54.65	23	38	17	3	15	35	35	23	12	0.35	0.45	FS 6242
24	A, B		61.12	59.74	23	38	17	3	15	40	39	25	12	0.43	0.56	FS 6848
26	A, B		66.21	64.84	23	38	17	3	15	40	42	25	12	0.51	0.65	FS 7555
28	A, B		71.30	69.93	23	38	17	3	15	50	44	30	12	0.60	0.82	FS 7753
30	A, B	구상흑연주철	76.39	75.02	23	38	17	3	15	50	49	30	12	0.70	0.92	FS 8363
32	A, B		81.49	80.12	23	38	17	3	15	65	51	42	12	0.81	1.1	FS 8969
34	A, B		86.58	85.21	23	38	17	3	15	65	55	42	12	0.93	1.3	FS 9272
36	A, B		91.67	90.30	23	38	17	3	15	75	58	45	12	1.0	1.5	FS 9878
40	A, B		101.86	100.49	23	38	17	3	15	80	65	50	12	1.3	1.8	FS 10887
44	A, B		112.05	110.67	23	46	17	3	23	90	72	56	20	1.5	2.6	FS120100
48	A, B		122.23	120.86	23	46	17	3	23	100	78	62	20	1.9	3.2	FS129108
50	A, B		127.32	125.95	23	46	17	3	23	100	82	62	20	2.0	3.4	FS136116
60	A, B		152.79	151.42	23	46	17	3	23	100	107	62	20	3.0	4.4	FS160140
72	B1	구상흑연주철	183.35	181.97	27	50	—	—	23	100	—	62	25	—	6.6	—
84	B1		213.90	212.53	27	50	—	—	23	115	—	70	25	—	9.0	—
96	B1		244.46	243.09	27	50	—	—	23	130	—	80	30	—	11.7	—
120	B1		305.58	304.21	27	50	—	—	23	130	—	80	30	—	17.2	—
144	B1		366.69	365.32	27	50	—	—	23	130	—	80	30	—	24.0	—
156	B1		397.25	395.88	27	50	—	—	23	130	—	80	30	—	27.8	—

S8M0250 (벨트폭 25mm용)

는 재고판매 하고 있습니다. 단위 : mm

잇수	형상	재질	dp	do	W	l	WA	S	B	db	d			폴리예상질량 (kg)		플렌지 품 번
											MAX		MIN			
											A	B, B1	A, B, B1	A	B, B1	
18	A, B	기계구조용탄소강강재	45.84	44.46	34	49	28	3	15	29	28	19	12	0.32	0.38	FS 5333
19	A, B		48.38	47.01	34	49	28	3	15	34	30	22	12	0.36	0.46	FS 5638
20	A, B		50.93	49.56	34	49	28	3	15	35	32	23	12	0.41	0.51	FS 5939
21	A, B		53.48	52.10	34	49	28	3	15	35	34	23	12	0.46	0.56	FS 5939
22	A, B		56.02	54.65	34	49	28	3	15	35	35	23	12	0.52	0.62	FS 6242
24	A, B		61.12	59.74	34	49	28	3	15	40	39	25	12	0.63	0.77	FS 6848
26	A, B		66.21	64.84	34	49	28	3	15	40	42	25	12	0.76	0.89	FS 7555
28	A, B		71.30	69.93	34	49	28	3	15	50	44	30	12	0.90	1.1	FS 7753
30	A, B	구상흑연주철	76.39	75.02	34	49	28	3	15	50	49	30	12	1.0	1.2	FS 8363
32	A, B		81.49	80.12	34	49	28	3	15	65	51	42	12	1.2	1.5	FS 8969
34	A, B		86.58	85.21	34	49	28	3	15	65	55	42	12	1.3	1.7	FS 9272
36	A, B		91.67	90.30	34	49	28	3	15	75	58	45	12	1.5	2.0	FS 9878
40	A, B		101.86	100.49	34	49	28	3	15	80	65	50	12	1.9	2.5	FS 10887
44	A, B		112.05	110.67	34	57	28	3	23	90	72	56	20	2.3	3.4	FS120100
48	A, B		122.23	120.86	34	57	28	3	23	100	78	62	20	2.8	4.1	FS129108
50	A, B		127.32	125.95	34	57	28	3	23	100	82	62	20	3.0	4.4	FS136116
60	A, B		152.79	151.42	34	57	28	3	23	100	107	62	20	4.5	5.8	FS160140
72	B1	구상흑연주철	183.35	181.97	38	61	—	—	23	100	—	62	25	—	8.7	—
84	B1		213.90	212.53	38	61	—	—	23	115	—	70	25	—	11.9	—
96	B1		244.46	243.09	38	61	—	—	23	130	—	80	30	—	15.6	—
120	B1		305.58	304.21	38	61	—	—	23	130	—	80	30	—	23.3	—
144	B1		366.69	365.32	38	61	—	—	23	130	—	80	30	—	32.8	—
156	B1		397.25	395.88	38	61	—	—	23	130	—	80	30	—	38.3	—

d MAX 치수의 키홈 가공의 경우 별도 상담을 해주십시오.